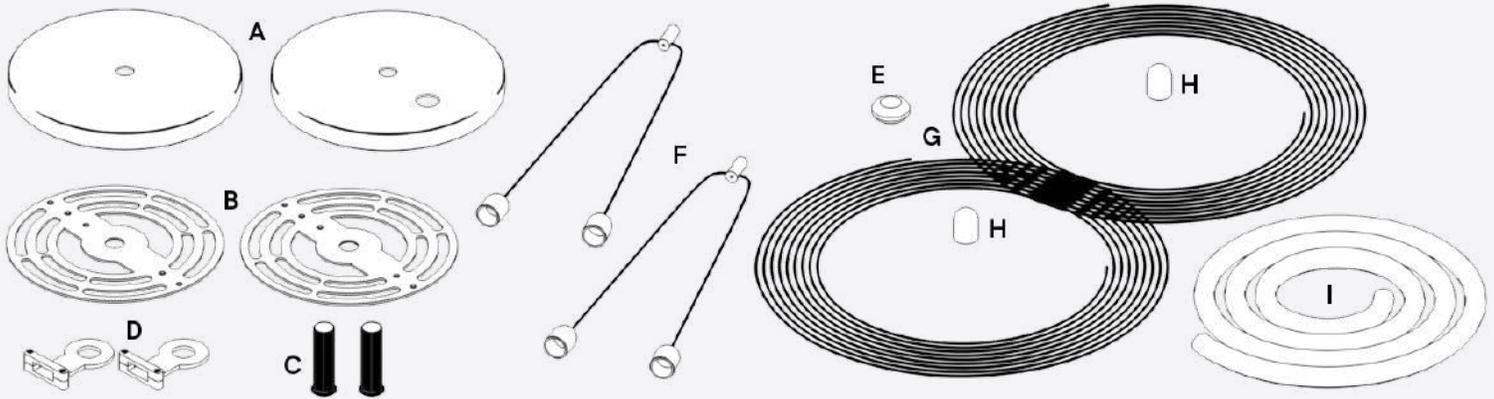
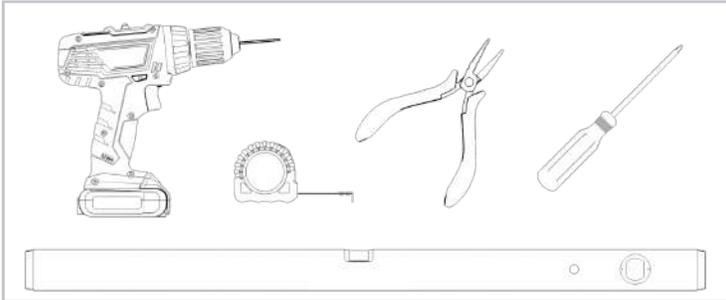



Acoustic ceiling installation with JBOX


Two preinstalled octagon shape j-boxes or j-box with round cover recommended for the proper and clean installation.


- A: J-box cover plate
- B: Mounting plates
- C: Hanger bolts
- D: Cable retainer
- E: Cable bushing
- F: Mounting Brackets
- G: Bracket pins
- H: Aircraft cable caps
- I: Grippers
- J: Aircraft Cable 16ft

Step-by-step instructions

Step 1 - Getting ready

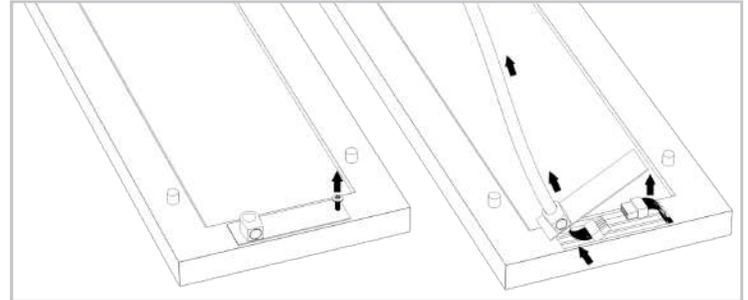
Prior to installation, make sure nothing is missing from the list above; the electrical power is off, and necessary tools are handy.


Step 2 - Preparing connections

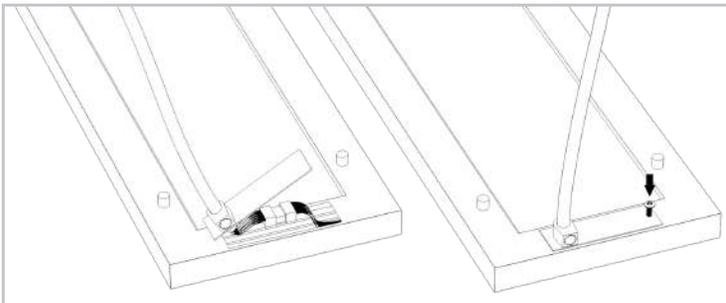
Find the connector compartment on one side of the fixture. Unscrew the lid and detach it.


Step 3 - Connecting

Connect male and female connectors and fit them into the compartment. Reattach the lid again and screw it closed.

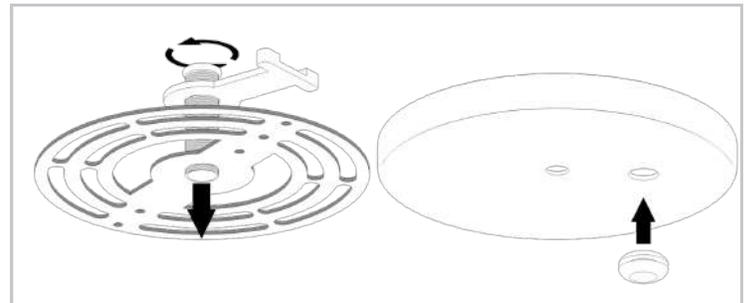

Step 4 - Preparing the J-box power feed canopy side

Insert the cable retainer onto the hanger bolt and screw it through the mounting plate. Fit the cable bushing on the power feed canopy plate for the fixture's cable.

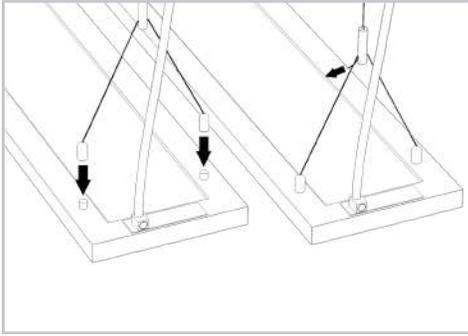


Step 5 - Preparing Suspension

Insert the cable retainer onto the hanger bolt and screw it through the mounting plate. Fit the cable bushing on the power feed canopy plate for the fixture's cable.

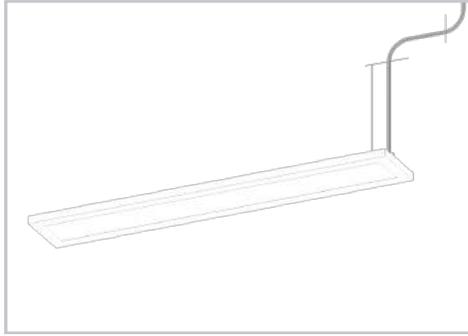


Step 6 - Taking measurements

Measure and mark the desired area you want to mount the fixture, then measure the height from the fixture to the ceiling. The aircraft and power feed cables are 16 ft long and the fixture can be placed within that distance.

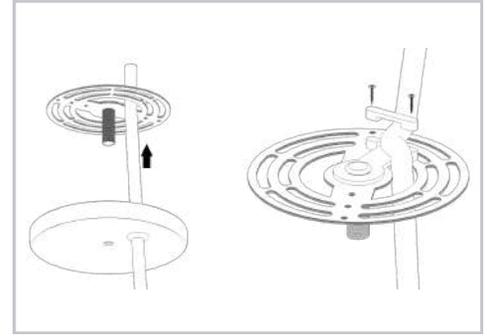


Step 7 - Securing the cable

Pull the feeding cable through the cable bushing and the mounting plate. Secure at least 6 inches of the line on the mounting plate in the cable retainer using two small screws.

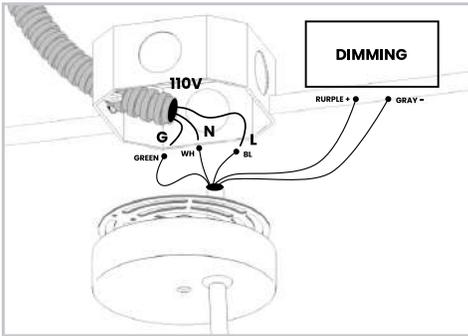


Step 8 - Wiring

Connect the feeding cable wires according to the preinstalled electrical wires inside the J-box.

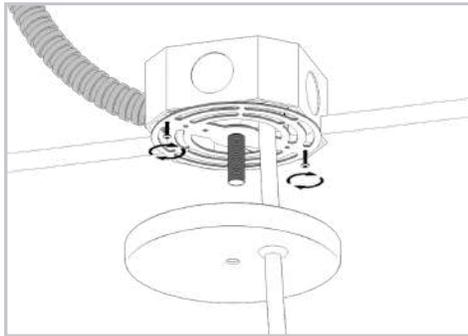


Step 9 - Secure mounting plate

Fasten the mounting plate to the J-box with provided screws.

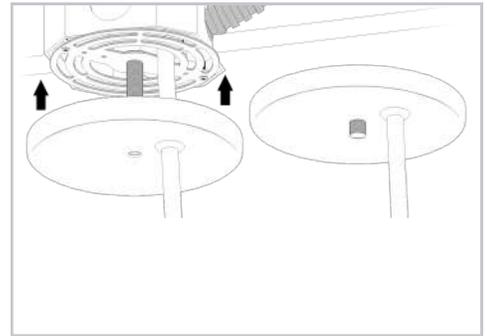


Step 10 - Placing the canopy

Insert the canopy cover plate through the hanger bolt and securely place it on the J-box.

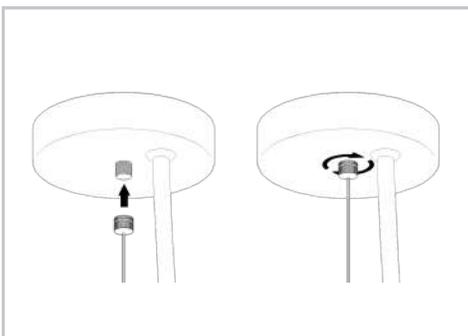


Step 11 - Securing the Canopy

Cover T clip with canopy, so T clip bolt sticks out. Attach the aircraft cable cap to the T clip bolt.

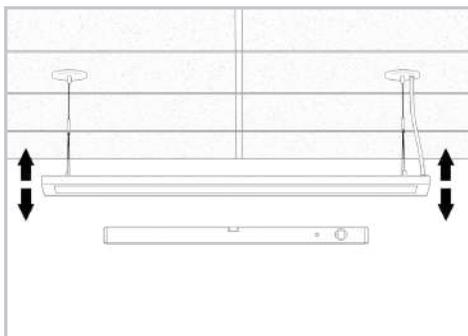

Step 12 - Adjusting the height and level

Push the aircraft cable into the gripper on the mounting bracket to adjust the desirable length, making sure the lighting fixture is level.

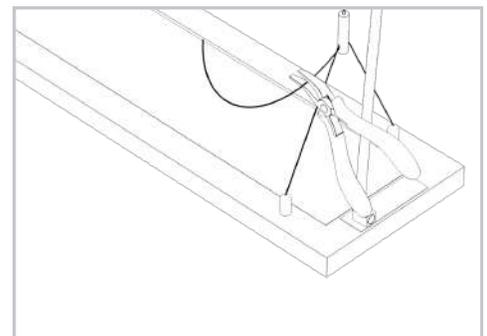

Step 13 - Complete installation

When the desired height of the fixture is secured, cut the excess aircraft cable.