




Round Ceiling Mounted Pendant



Description

Designed to be more energy-efficient than traditional light bulbs, this flat round ceiling light is a great new option for commercial buildings. The fixtures will add a modern look to any space with their bright, sleek design. They can light up an entire room and are great for offices or retail establishments that need a lot of lighting in one place. No matter your business type, these flat LED light fixtures will increase productivity and efficiency while saving you money on electricity costs. The pendants are also dimmable so that you can create the perfect ambiance for your space. The pendant is surface-mounted, so the installation process can be quick without needing an electrician.

Body color

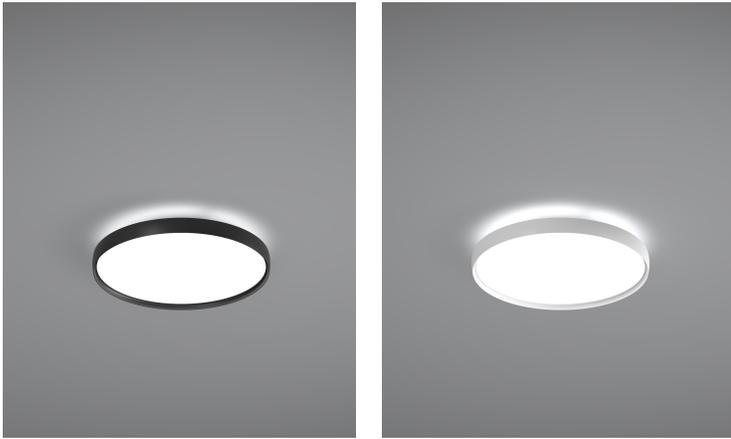


Performance per fixture




Material:	Aluminum Casing
Light Direction:	Up & Down
Color Temperature:	CCT Changeable 3000K, 3500K, 4000K
Lumin Output:	7000 for Down or 5000/2000 for Bi-directional
CRI:	95+
Dimming:	0-10V / 1-10V
Dimensions:	23.5"(L) x 23.5"(W) x 2.25"(H)
Input Voltage:	100-277 VAC
Total watts:	65W
Average Lifetime:	50,000 Hours

Types of Installation

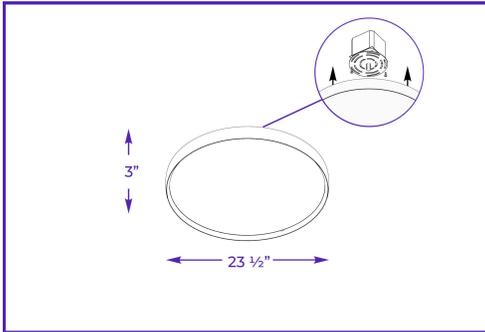


J-BOX mount

Is a standard installation type for the Round fixture. Each canopy set includes all the necessary hardware for j-box installation. The maximum length of the aircraft and power cables is 15 feet. Ideally fits on 3.5" and 4" octagon/square j-box.

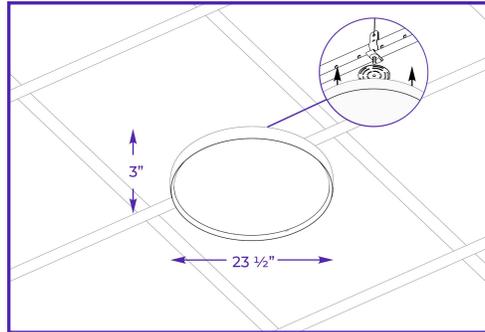

T-Clip (for drop ceiling)

Is an optional hardware bracket for suspended ceilings that allows Round fixture suspension directly on the T-grid. T-clip fits on a 15/16" grid, and it comes as a set of two brackets per fixture.

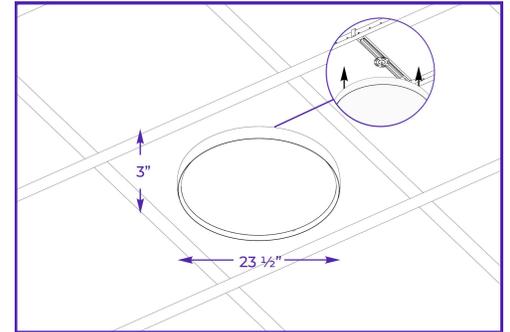

T-Support (for drop ceiling)

Is an optional hardware bar for suspended ceilings installations that allows Round fixture suspension through the panels and between the T-grids. It is fully adjustable for symmetric/asymmetric fixture positioning.

Ordering guide

Sample: RCMP-W-24'-TS

Model:	Round Ceiling Mounted Pendant (RCMP)	
Color:	B-Black / W-White	
Size:	24'	
Mouting type:	TS-T-support / TC-T-clip / J-j-box mount	